

TINETTO BASE



Features:

- Ground or wall mounting
- IP66 (dust tight & strong water jet proof)
- IK10 (20 joule) shock resistance
- Energy efficient chip-on-board (COB) LED
- Available in 3000K (warm white)
- CRI 85
- Average 50,000 hrs LED life - L80 B10
- 38° optical reflector as standard

Accessories:

- IP68 cable connector
- Optical reflectors available:
 - 20°, 65° and 70°

Material:

- Body: die-cast aluminium with anti-oxidising treatment
- Lens: 8mm tempered safety glass
- Reflector: thermoplastic

Finish:

- Body: powder coated
- Reflector: vacuum metallised

Colour:


- 02 Black
- 03 Metallic Grey

Beam Angles:




DISPLAY

Technical

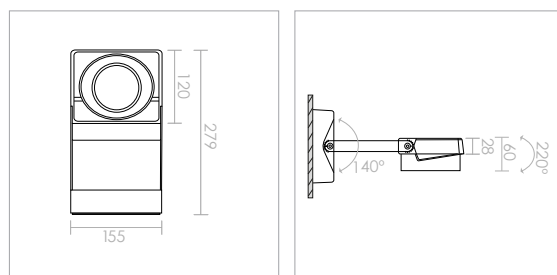

Photometrics

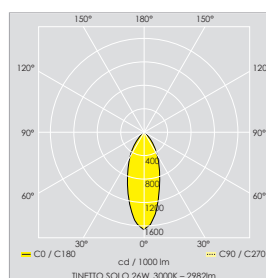

Tinetto Base					Ordering Code	
	Colour Temperature	LED Lumens	Delivered Lumens	Luminaire Efficacy	Black	Metallic Grey
26W LED	3000K	3350lm	2982lm	114lm/W	85-131-070-302	85-131-070-303

Accessories	Ordering Code
IP68 cable connector	A85-01-01-00
20° optical reflector	A10-08-01-00
65° optical reflector	A10-08-02-00
70° optical reflector	A10-08-12-00

